

LAVA 2SP-ISA [DB-9, DB-9]

ISA Bus 16550 Dual Serial Board and Bi-Directional Parallel Port Board

Features & Benefits

- Adds two 9-pin 16550 UART serial ports and one bi-directional parallel port to ISA equipped PCs
- Serial ports are capable of a maximum throughput rate of 115.2 kbps
- One 25-pin bi-directional parallel port
- Jumper configurable port, address, and IRQ settings
- Compatible with any RS-232 serial or parallel peripheral
- LAVA Lifetime Warranty


Connectors

- Two DB-9 male RS-232
- One DB-25 female bi-directional parallel

System Requirements

- ISA host slot (16 bit)

For updated support visit www.lavalink.com.

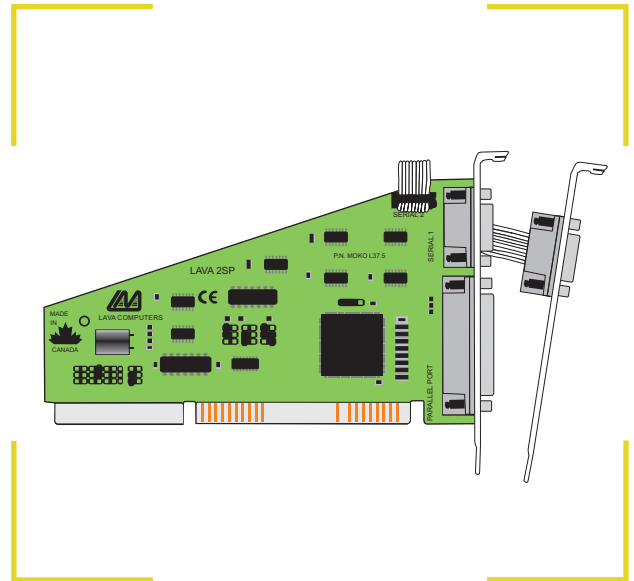

Copyright ©
LAVA Computer MFG Inc.
Printed in Canada.
Specifications subject
to change without notice.

