

LAVA DSerial-550

ISA Bus Dual 16550 Serial Board

Features & Benefits


- Adds two 9-pin 16550 UART serial ports to ISA-equipped PCs
- Each port is capable of a maximum data throughput rate up to 115.2 kbps
- Each port independently configurable as Com1 through Com4
- Compatible with RS-232 serial peripherals including modems, PDAs, digital cameras, bar-code scanners, and UPSes
- Each port selectable for any of
 - IRQ 2/3/4/5/7/10/11/12/15
- Lava Lifetime Warranty

Connectors

- Two DB-9 male RS-232

System Requirements

- ISA host slot

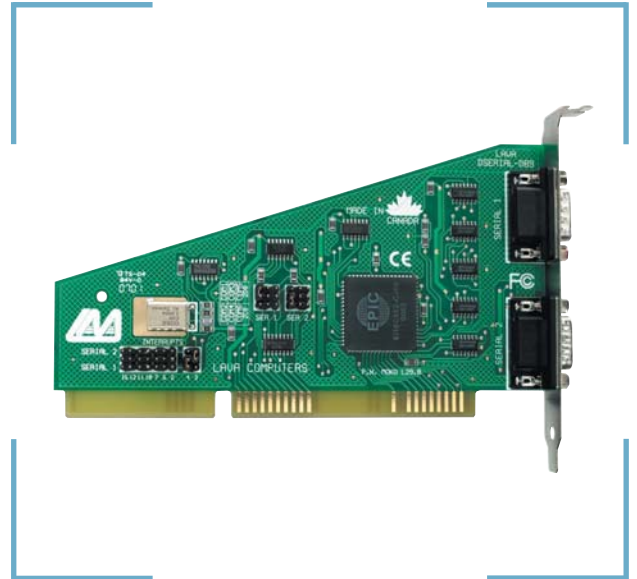

FC CE