

LavaPort-ISA [Link-650] ISA Bus Single 16650 Serial Port Board

Features & Benefits

- Adds one 9-pin 16650 UART serial port to ISA-equipped PCs
- Port is capable of a maximum data throughput rate up to 460.8 kbps
- Integrated 32-byte FIFO buffers with software configurable Rx/Tx triggers, 4x clock, and on-board flow control guarantee errorless data transmission even at top speed
- Configurable as Com1 through Com4 using any of IRQ 2/3/4/5/10/11/12/15
- Compatible with RS-232 serial peripherals including 56K and ISDN modems, PDAs, digital cameras, bar-code scanners, and UPSes
- Ships with drivers for Windows 3.1/3.11/95/98/ME/NT 4.0
- Lava Lifetime Warranty


Connectors

- One DB-9 male RS-232

System Requirements

- ISA host slot

Drivers ship with product. For updated software support visit www.lavalink.com.

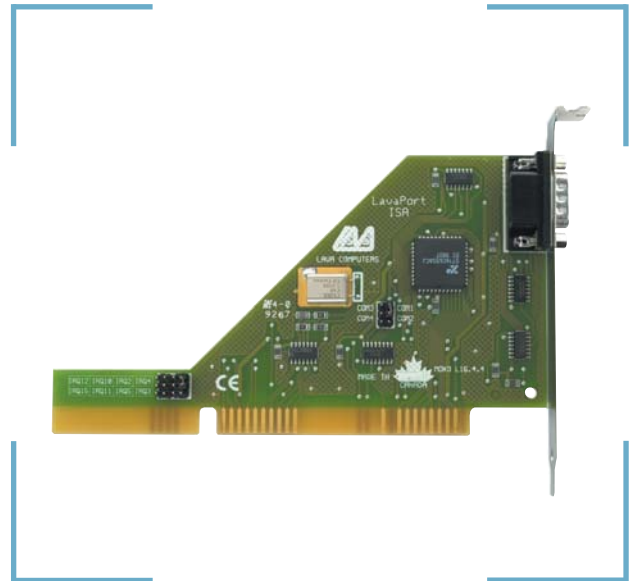

FC CE

