


LAVA RS422-550 ISA Bus Dual 16550 Serial Board with RS422 Drivers/Receivers

Features & Benefits

- Adds two 16550 UART serial ports
 - (both 9-pin female) to ISA-equipped PCs
 - Each serial port independently configurable as Com1 through Com6
 - Each serial port selectable for any of IRQ 2/3/4/5/7/10/11/12/15
 - Compliant with RS422 specification - balanced pair transmission
 - Ideal for use in industrial applications over long distances up to 4000 feet
- Lava's RS422 pin-out:

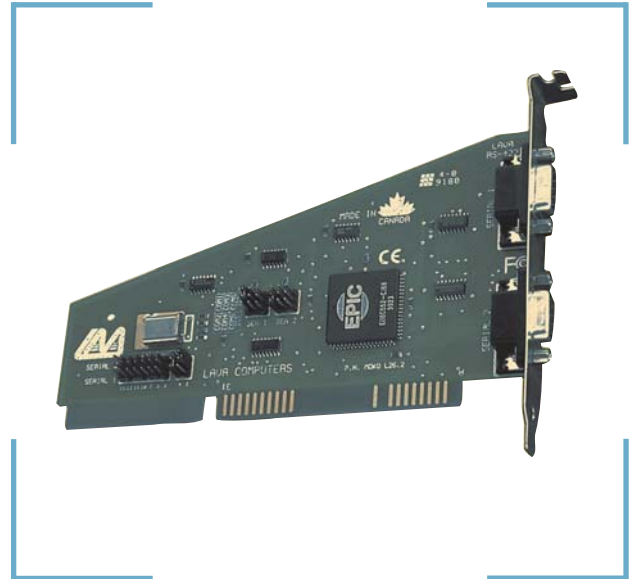

- [also: pin-out diagram]

- Lava Lifetime Warranty

Connectors

- Two DB-9 female RS-422

System Requirements

- ISA host slot

FC CE